



# SEAMING MACHINE



*K2 plus*

*K3 plus*




# SEAMING MACHINE

- Unwind Edge Guide System
- Independent Unwind, Forming and Rewind Tension Zones
- Frictionless Forming System
- Automatic Layflat Set-up
- Automatic Layflat Correction
- Direct Injection Solvent Application System
- Automatic Solvent Positioning System
- Proportional Solvent Speed Control
- Rewind Oscillation
- Fastest Set-up in the Industry

## STANDARD SPECIFICATIONS

Model	300D-FS	350D-FS
Unwind Width	620 mm	720 mm
Unwind Diameter	600 mm	800 mm
Unwind Unit	Cantilever Air Shaft	Shaftless Unwind Unit
Lay Flat Width	40-300 mm	40-350 mm
Rewind Diameter	700 mm	
Max. Machine Speed	500 m / min	

## MACHINE WEB PATH LAYOUT

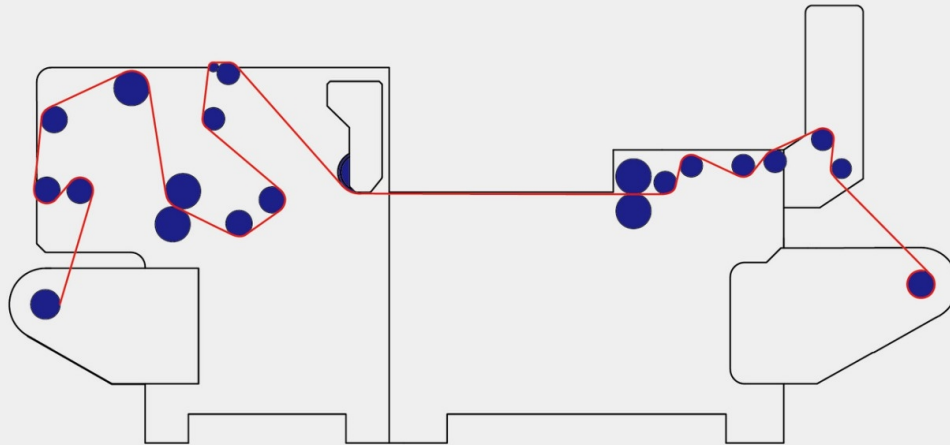

**webcontrol**

WEBCONTROL MACHINERY CORP.

No. 1, Jingke 7th Rd., Nantun Dist.,  
Taichung City 40852, Taiwan  
Tel: +886-4-23587272 Fax: +886-4-23580882  
[www.webcontrol.com.tw](http://www.webcontrol.com.tw)

**KARLVILLE**  
BEYOND CONVERTING

KARLVILLE DEVELOPMENT LLC

3600 NW 59th St., Miami, FL 33142  
Phone: +1-305-533-1051  
Fax: +1-786-329-5696  
[www.Karlville.com](http://www.Karlville.com)