

# SHRINK SLEEVE




## K4



### K4 COMPACT SPECS:

- Speed 400 m/min
- Available Widths 350/500 mm
- Material Widths 850/1050 mm
- Unwind Diameter 700 mm
- Rewind Diameter 600 mm
- Minimum Lay Flat Width 55 mm with 18 mm Option
- Core Diameter 3" (76 mm)
- Lay Flat Tolerance 0.25 mm
- Adjustable Forming System
- Driven Unwind
- Rewind Turret Cantilever

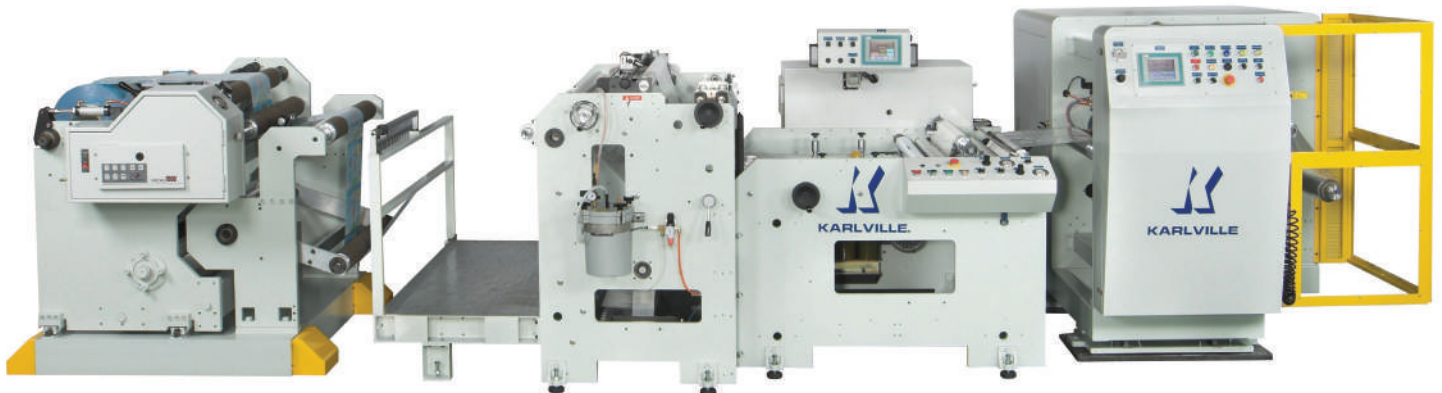

### K4 JUMBO SPECS:

- Speed 400 m/min
- Available Widths 350/500/800 mm
- Material Widths 850/1050/1650 mm
- Unwind Diameter 800 mm
- Rewind Diameter 600 mm
- Minimum Lay Flat Width 55 mm with 18 mm Option
- Core Diameter 3" (76 mm)
- Lay Flat Tolerance 0.25 mm
- Adjustable Forming System
- Independent Jumbo Unwind
- Rewind Cantilever Turret



# KARLVILLE

BEYOND CONVERTING

# SPEED AND



## **K5 COMPACT SPECS:**

- Speed 400 m/min
- Available Widths 350 mm
- Material Widths 850 mm
- Unwind Diameter 600 mm
- Rewind Diameter 600 mm
- Minimum Lay Flat Width 55 mm with 18 mm Option
- Core Diameter 3" (76 mm)
- Lay Flat Tolerance 0.25 mm
- Adjustable Forming System
- Unwind Cantilever Turret
- Rewind Cantilever Turret

# K5 COMPACT



# RELIABILITY



## K5 JUMBO SPECS:

- Speed 400 m/min
- Available Widths 350/500 mm
- Material Widths 850/1050 mm
- Unwind Diameter 800/1000 mm
- Rewind Diameter 600 mm
- Minimum Lay Flat Width 55 mm with 18 mm Option
- Core Diameter 3" (76 mm)
- Lay Flat Tolerance 0.25 mm
- Adjustable Forming System
- Unwind Supported Turret
- Rewind Cantilever Turret

# K5 JUMBO